


## FINNED COPPER EXCHANGER - SINGLE PIPE

Exchange surface (m <sup>2</sup> )	Power ΔT 35 °C (kW)	Hole A (mm)	Length L (mm)	Diameter Ø (mm)	Hydraulic fittings
1.80	36	30x70	470	170	3/4"
2.30	45	30x70	570	170	3/4"
2.63	50	30x70	570	190	3/4"
3.17	60	30x70	660	190	3/4"
4.54	90	30x70	1000	190	3/4"

## FINNED COPPER EXCHANGER - DOUBLE PIPE

Exchange surface (m <sup>2</sup> )	Power ΔT 35 °C (kW)	Hole A (mm)	Length L (mm)	Diameter Ø (mm)	Hydraulic fittings
3.60	72	40x90	670	190	1"
4.54	90	40x90	750	190	1"
5.26	100	40x90	850	190	1"
6.34	120	40x90	980	190	1"

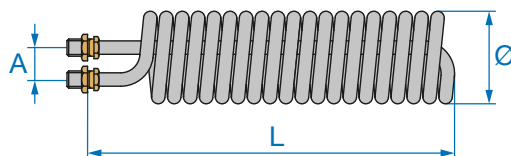

## FINNED TINNED COPPER EXCHANGER - SINGLE PIPE

Exchange surface (m <sup>2</sup> )	Power ΔT 35 °C (kW)	Hole A (mm)	Length L (mm)	Diameter Ø (mm)	Hydraulic fittings
0.76	15	30x70	400	112	3/4"
1.00	20	30x70	490	112	3/4"
1.14	25	30x70	550	112	3/4"
1.53	30	30x70	700	112	3/4"
1.80	36	30x70	470	170	3/4"
2.30	45	30x70	570	170	3/4"
2.63	50	30x70	570	190	3/4"
3.17	60	30x70	660	190	3/4"

## FINNED TINNED COPPER EXCHANGER - DOUBLE PIPE

Exchange surface (m <sup>2</sup> )	Power ΔT 35 °C (kW)	Hole A (mm)	Length L (mm)	Diameter Ø (mm)	Hydraulic fittings
3.60	72	40x90	670	190	1"
4.54	90	40x90	750	190	1"
5.26	100	40x90	850	190	1"
6.34	120	40x90	980	190	1"